

skheme®



aspley



aspley



pearl



tawn




gris



greige



grafito

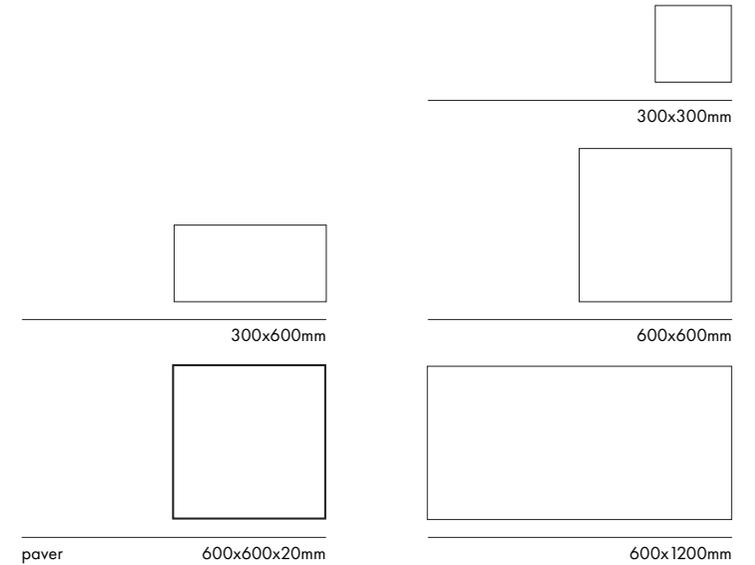

fire resistant



sustainable



slab available



outdoor



paver



P2 slip rating



P3 slip rating



P5 slip rating



V2 variation

PRODUCT SPECIFICATIONS

	format	size	finish	thickness	slip rating	colour
tile		300x300mm	matt	10mm	P3	all colours
tile		300x600mm	matt grip	10mm	P3 P5	all colours
tile		600x600mm	matt grip	10mm	P3 P5	all colours
paver		600x600mm	grip	20mm	P5	all colours
tile		600x1200mm	matt	10mm	P2	all colours
slab		1200x2700mm	matt	6mm	P2	pearl greige gris

MATERIAL

glazed porcelain

VARIATION

V2

TILE EDGE

rectified


Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone.

Listed sizes are nominal and may vary slightly from actual working dimensions.


A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com



left pictured: greige
right pictured: pearl

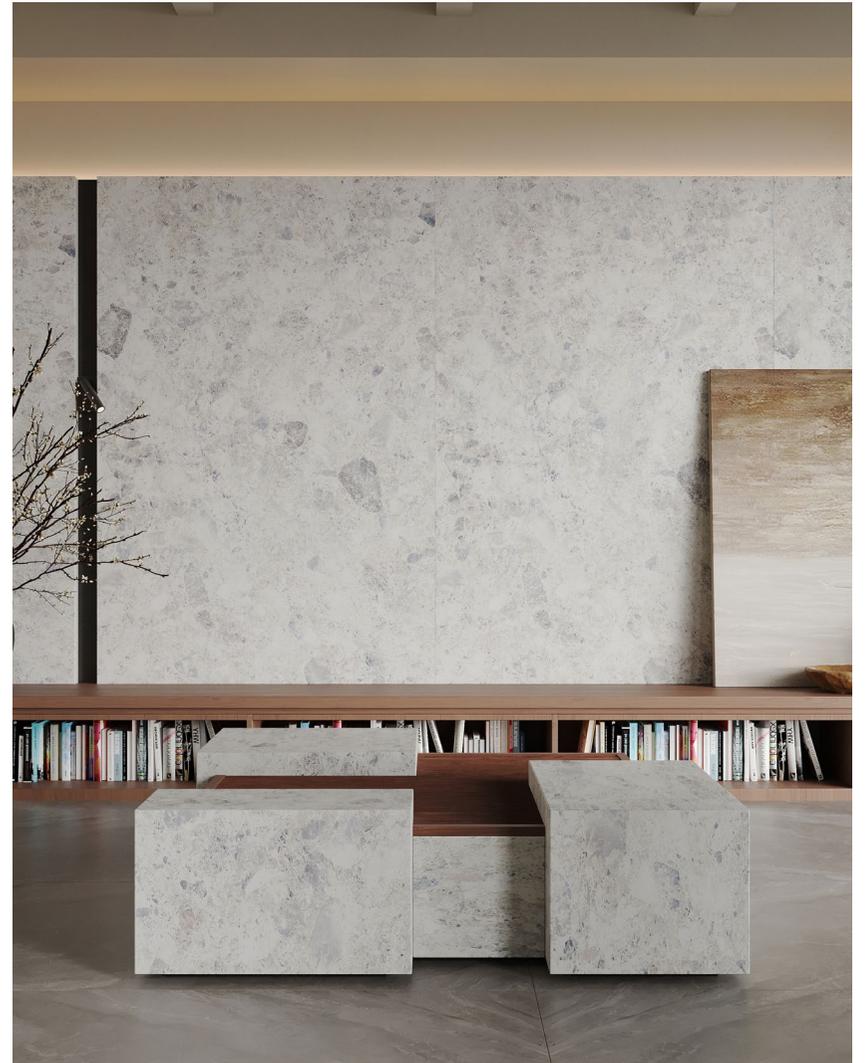

left pictured: greige
right pictured: greige

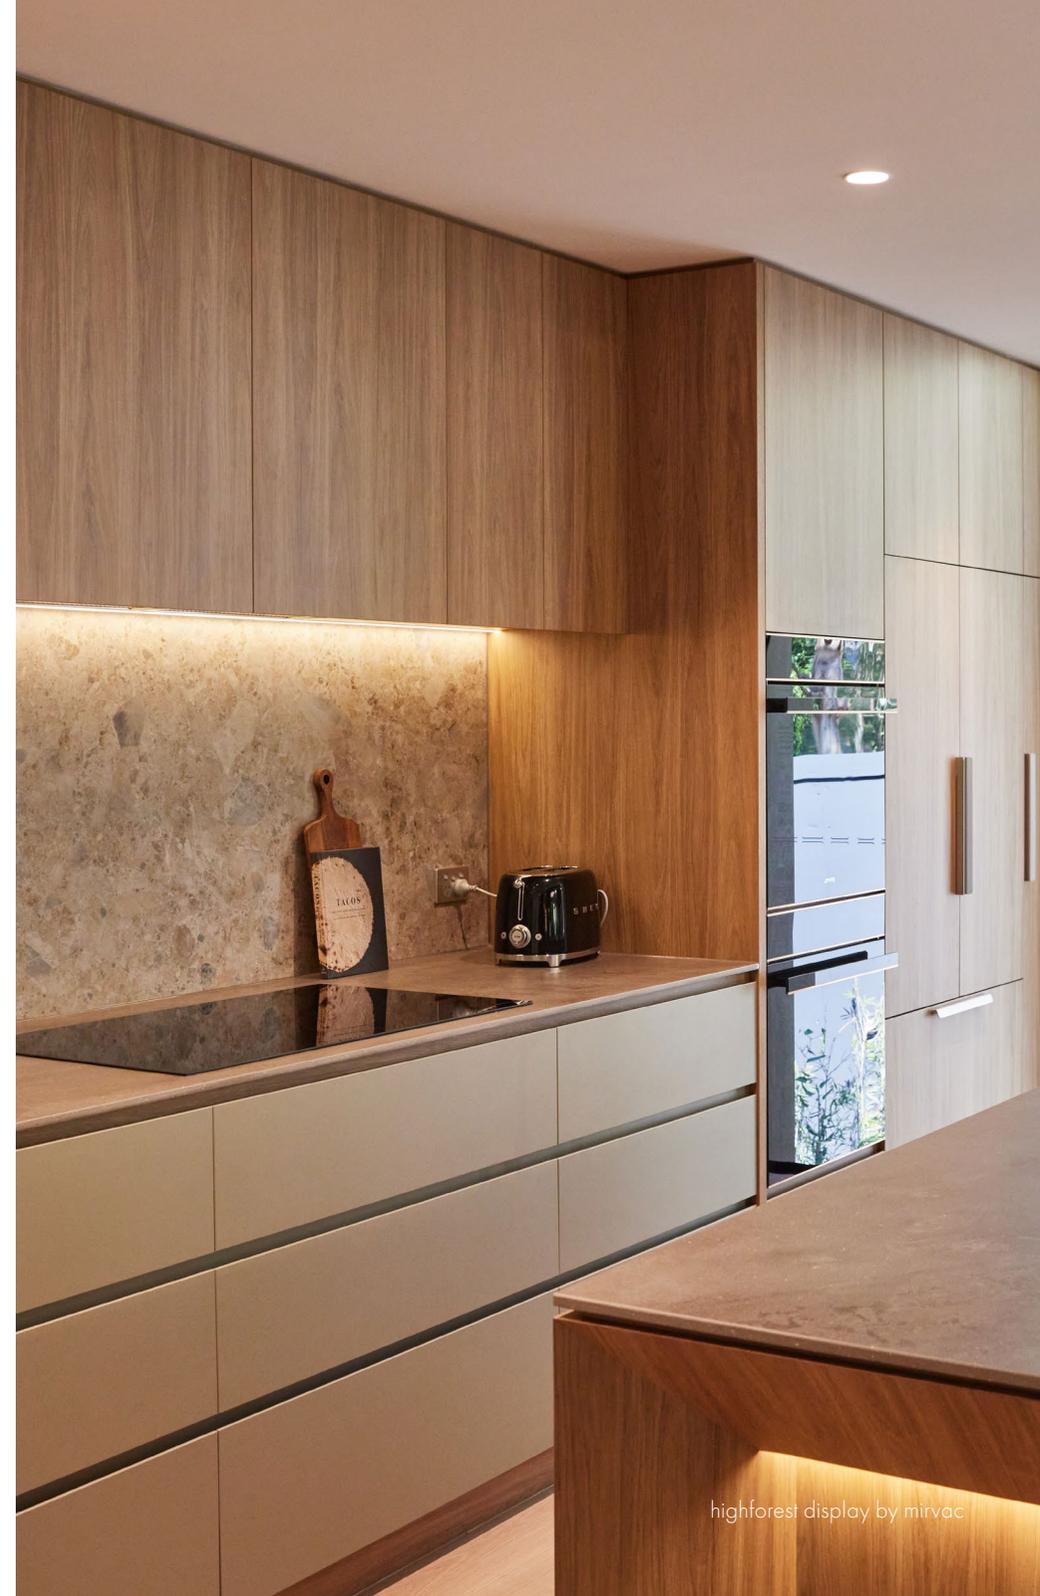

technical data - tile

properties	test method	prescribed values	value
WATER ABSORPTION	ISO 10545-3	E<0.5%	0.08%
BENDING STRENGTH	ISO 10545-4	≥ 12 MPA	≥ 33.5MPA
BREAKING STRENGTH	ISO 10545-4	≥ 1300 N	2573 N
ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com

technical data - paver

IMPORTANT NOTE: The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions.


properties	test method	prescribed values	value
WATER ABSORPTION	ISO 10545-3	E<0.5%	0.04%
BENDING STRENGTH	ISO 10545-4	Minimum 35	45.60
BREAKING STRENGTH	ISO 10545-4	≥ 1300 N	11427
ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.

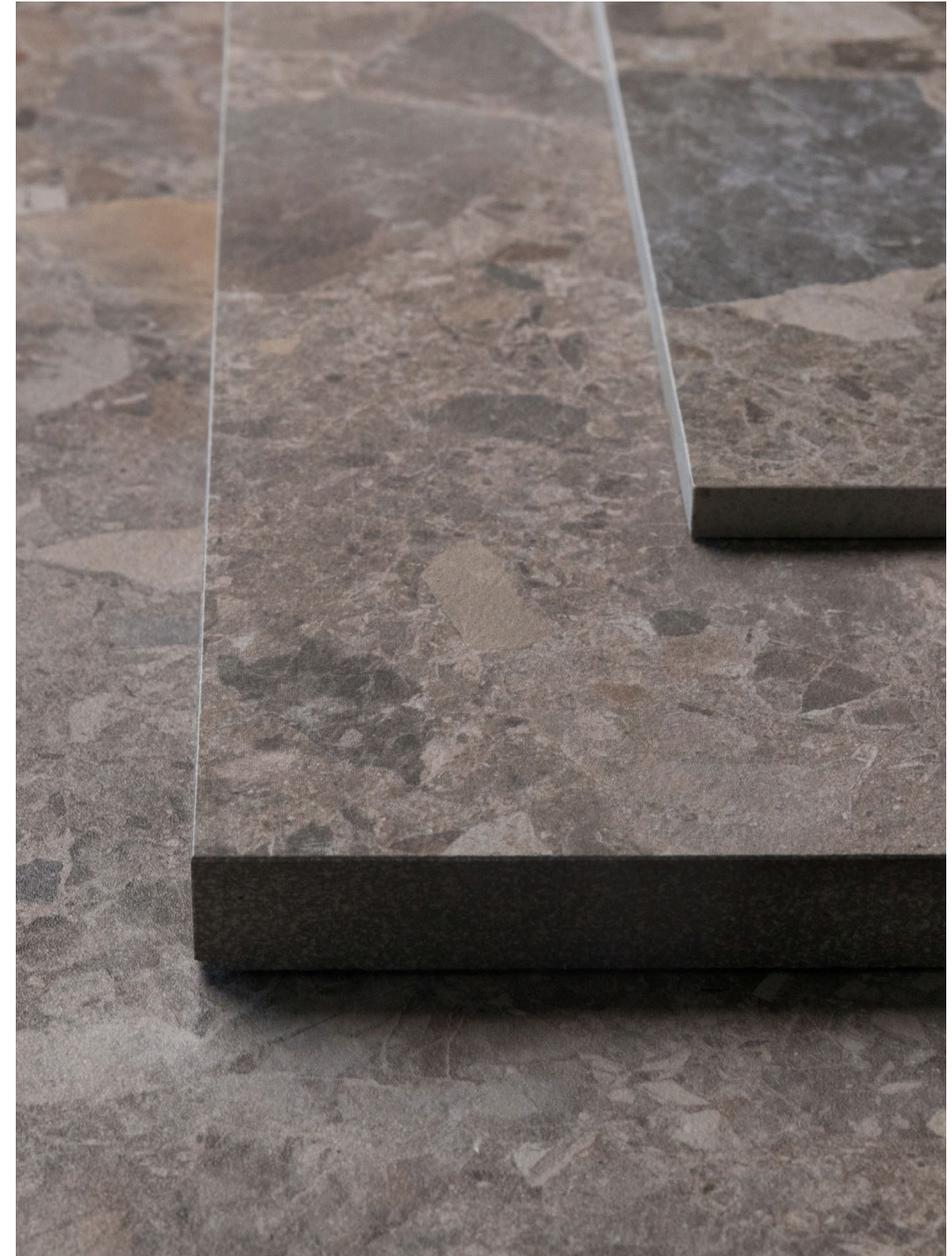

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com